



STOUGHTON INTERMODAL REFRIGERATED CONTAINER



**BUILT TO PERFORM.
BUILT TO LAST.**

53-ft Length | 102-in. Height | Three-High Stacking Capability

Stoughton brings the proven construction of its industry-leading PureBlue® refrigerated trailer to a new 53-ft domestic refrigerated container engineered for superior thermal performance, strength and durability.

SMOOTH CLEAN INTERIOR


Heavy-duty Huck fasteners provide strong, vibration-resistant joints, while 3/8-inch blind fasteners minimize exposed hardware and drilled holes for a cleaner interior.



Recessed logistics track options available from full to partial length.

INSULATED FLAT-PANEL SIDEWALLS

Smooth flat-panel sidewalls feature 2 inches of insulation with bonded posts between seams, reducing rivets and potential leak points while improving thermal performance and providing a clean surface for graphics.

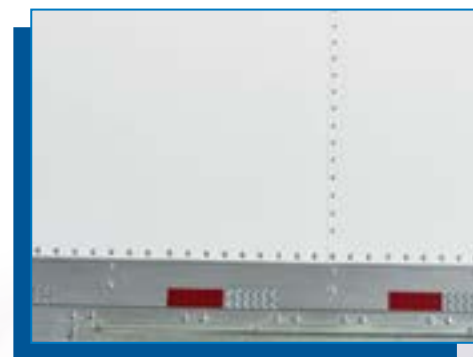

PROTECTED REFRIGERATION

A rugged, galvanized frame protects TRU during stacking and transit. Fastened construction simplifies repairs.



STACKED WITH SMARTER DETAILS

Fully galvanized stacking posts feature protective clearance zones and drainage. A 4-3/4-inch upper casting is integrated within the insulation to maintain the container profile, while the recessed lower frame helps prevent IBC damage.



EXTENSIVE GALVANIZED PROTECTION

Most critical structural components are galvanized for greater durability and longer service life. Wax-coated crossmembers are standard with galvanized option available, as seen in photo.



TRIPLE-WIPER REAR DOOR SEAL

Stoughton's exclusive triple-wiper door seal maintains its shape for a consistently tight closure, delivering proven airtight performance without the permanent set of conventional compression gaskets.



HIGH-STRENGTH DUCT FLOOR

The proven heavy-duty duct floor features a fully enclosed design with proprietary thermo-plastic insulators for superior load support and durability. A knurled surface adds skid resistance, while a 10-inch composite scuff (measured from the floor), protected rear sill and four dock plates help prevent loading damage.

Options include 20,000-lb. duct and flat floor configurations. Other insulation thicknesses available. High-performance polymer floor insulators replace wood in the container, extending floor life by eliminating deterioration.



SECURE CARGO ACCESS

Heavy-duty double-lock rods provide secure closure. Heavy duty 4-inch steel hinges with recessed hinge butts are engineered for container applications.



STOUGHTON®

Stoughton Trailers LLC • 1800 Greenbriar Drive
Stoughton, Wisconsin 53589
608/873-2500 • sales@stoughtontrailers.com
stoughtontrailers.com/products-and-services/container

DISTRIBUTED BY: